

3350 Davie Road, Suite 203 Davie, FL 33314 (954)463-1075

www.kus-usa.com www.kusauto.com/en

## **Product Data Sheet**








Description:	The NMEA tachometer gauge allows the user to remotely monitor to monitor the gear speed of their engine. These tachometer gauges will work with NMEA 2000 senders or resistive type senders with an analog converter.
Product Type:	Water Tachometer Gauge
Product Name:	NMHB
Bezel:	SUS 316 Stainless Steel
Face Plate:	Black White
Mounting Dimension:	85mm, 3 3/8"
Protection Rating:	IP 67
Input Signal:	NMEA 2000 & J1939
Indicating Range:	0 - 7000RPM
Operating Voltage:	12V/24V
Background light	Red LED
Connector:	Standard NMEA 2000 cable. 1 meter long
Movement:	Cross coil motor movement



3350 Davie Road, Suite 203 Davie, FL 33314 (954)463-1075 www.kus-usa.com

www.kusauto.com/en

## **Installation Instructions**

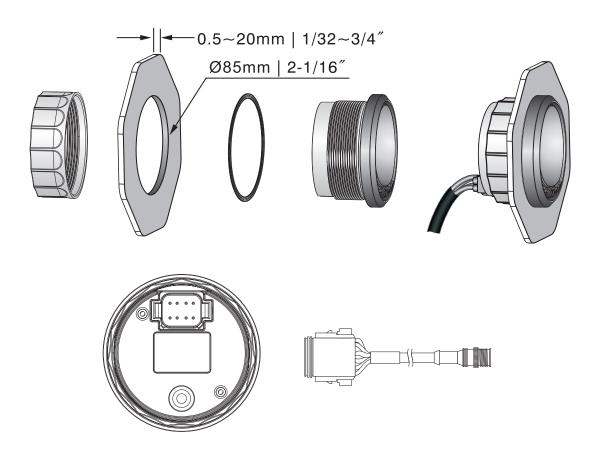

## **INSTALLATION STEPS**

- 1. Cut a  $\Psi 85$ mm hole on the panel and ensure there is enough space behind the panel for gauge and harness mounting.
- 2. Assemble the seal ring into the gauge, then mount the gauge into the hole on the panel. Screw tightly with fastening ring.
- 3. Connect the cables as shown in the diagram.